
LED tubular light fitting

TUBEO
110 12L VARST
[Item no. : 11000 0300]




General product description

LED tubular light-fitting TUBEO with step-adjustable luminous flux directly via the existing switch in the current electrical installation with impact-resistant clear tube Ø 100mm, stainless steel locking caps, foamed silicone gasket and special element for length compensation. Powder-coated sheet steel reflector with Zhaga LED modules, frosted LED covers for glare limitation and ECG with overload and short circuit protection. Electrical connection by connection plug (FastConnect), male connector pre-installed, female with strain relief attached. Two stainless steel pipe clamps included.



General product benefits

- reduction of type diversity due to adjustable luminous flux
- simple, fast and toolless setting of the luminous flux on-site by means of existing switch or contactor, adjustable at any time
- high flexibility due to the ability to adjust the luminous flux in several steps
- sturdy, extremely rugged tubular light fitting for application in rough environments
- dust- and pressure water-proof
- suitable for high-pressure or steam cleaning (IPX9K)
- highly efficient by using high-quality LED modules
- colour rendering index CRI>80, according to the workplace guidelines suitable for nearly all plant locations
- homogenous illumination due to frosted protective covers on the LED modules, comfortable perception of light and brilliant glare limitation
- FastConnect - quick connection without opening the light fitting
- variable mounting distances due to pipe clamps
- interchangeable components
- future proof by using standardised Zhaga LED modules

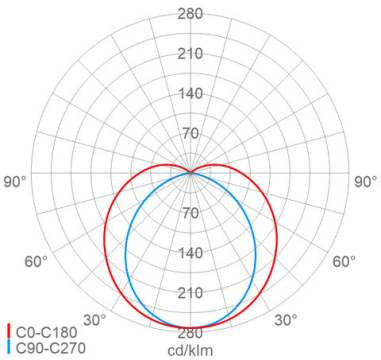

Applications

- areas, which are endangered by water jets, e.g.car washs, inspection pits, docks, ships, slaughterhouses etc.
- light fitting is not suitable for use in areas with saline atmosphere
- for damp and cold ambient conditions with low duty cycles, please contact us

LED tubular light fitting

TUBEO
110 12L VARST
[Item no. : 11000 0300]

Technical data

General

EAN/GTIN:	4041254454528

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	11 W, 39 W
Luminaire luminous flux:	1730 lm, 6290 lm
Luminous efficacy:	157 lm/W, 161 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 80
Light colour:	840
Admissible ambient temperature T_a:	-20 °C to +50 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection
Energy efficiency class:	B
I LED max:	400 mA
Special features:	variable luminous flux, adjustable in steps by an external switch (Attention: only min, max values listed above)

Lighting technology

Optical system:	Diffuser
Optical system material:	PMMA
Light distribution:	symmetrical wide beam
Beam angle:	120 °
Photobiological safety:	RG1

Service life

Service life LED:	L90>50000 h (@ Ta 25°C), L80>100000 h (@ Ta max)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Plug, 3-polig, 0,75 - 2,5 mm²
Max. no. with circuit breaker B16:	23
CB B10/B13/B20:	15/19/29
CB C10/C13/C16/C20:	23/31/39/47
Cable entries:	Plastic, 6 - 10 mm

Features/Certificates

Protection class:	I
IP rating:	IP68 (3m), IPX9K
IK rating:	IK07
Limited surface temperature D:	Yes

Features/Certificates

Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Ceiling, Wall
Operating position:	horizontal
Mounting:	2-point
Swivel range:	0 - 360 °
Special features:	2 stainless steel pipe clamps (included in scope of delivery)

Cover

Cover type / material:	Tube (PMMA)
Cover characteristic:	clear
Closure:	screwed (Stainless steel (1.4571))

Dimension/Weight

Length:	1355.00 mm
Width / Diameter:	133.00 mm
Height:	117.00 mm
Net weight:	4.40 kg

TUBEO
110 12L VARST
[Item no. : 11000 0300]

Optional accessories / spare parts

Item no.	Item name	Item description
90272 9001	110 RO V P	2 pipe clamps stainless steel
90273 9001	ABD 110 036	spare tube PMMA for 110 12..
90273 9002	ABD 110 058	spare tube PMMA for 110 15..
90273 9003	ABD 110 036 PC	spare tube PC for 110 12..
90273 9004	ABD 110 058 PC	spare tube PC for 110 15..
90049 0002	183 S	hook stainless steel for chain mounting
90278 9001	110 SVDA-3	Plug-in connector double connection 3 pole