LED damp-proof light fitting


163 15L VARIO IFS

[Item no. : 16319 0011]




General product benefits

- universally usable due to variable setting of the luminous flux depending on the requirement
- 4-step variable luminous flux setting
- quick and easy adjustment on-site
- adjustable at any time (e.g. change of use of the premises with new requirements in regard to the level of illumination
- for application in food industry areas, in accordance with IFS/BRC/VDMA standards, applicable without restrictions in plants, that have to fulfil the HACCP Concept
- high-quality light fitting with highly mechanical resistance
- shatterproof PC diffusor with very high impact resistance
- highly efficient by using high-quality LED modules
- maximum standardisation and highly economical storage (only one light fitting instead of multiple versions)
- sustainable, interchangeable components
- future proof by using standardised Zhaga LED modules

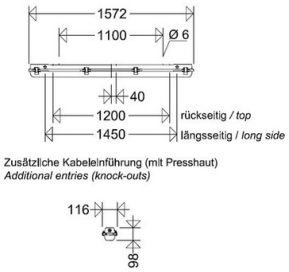

Applications

- humid, wet and dusty indoor areas and sheltered outdoor areas in commerce, trade and industry etc.
- areas, where one standardised LED-light fitting with variable setting of luminous flux shall be used for different illumination tasks
- food industry, food processing factories and suppliers to the food industry that have to fulfil IFS, BRC or HACCP standards or comparably strict requirements (e. g. production of food packaging). The light fitting is not sutiable for cleaning with cleaning and disinfection agents as well as for cleaning with high pressure cleaners
- for damp and cold ambient conditions with low duty cycles, please contact us

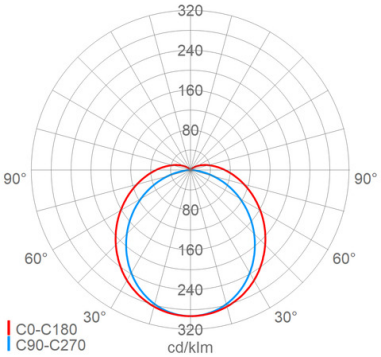

163 15L VARIO IFS

[Item no. : 16319 0011]

Technical data

General

EAN/GTIN:	4041254443881

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	25 W, 42 W
Luminaire luminous flux:	4110 lm, 7050 lm
Luminous efficacy:	164 lm/W, 168 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 80
Light colour:	840
Admissible ambient temperature T_a:	-20 °C to +40 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection
Energy efficiency class:	B
I LED max:	350 mA
Special features:	4-step adjustment luminous flux / connected load (Attention: only min, max values listed above). Max. ambient temperature depending on luminous flux setting

Lighting technology

Light distribution:	symmetrical wide beam
Beam angle:	120 °
Photobiological safety:	RG1

Service life

Service life LED:	L90>50000 h (@ Ta 25°C), L80>70000 h (@ Ta max), L70>100000 h (@ Ta max)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 3-polig, 0,75 - 2,5 mm²
Max. no. with circuit breaker B16:	25
CB B10/B13/B20:	16/21/32
CB C10/C13/C16/C20:	26/33/42/52
Cable entries:	M20 (2x), blanking plug (2x), Plastic, 8 - 15 mm

Features/Certificates

Protection class:	I
IP rating:	IP65

Features/Certificates

IK rating:	IK09
Limited surface temperature D:	Yes
Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Ceiling, Wall, Ceiling with bracket, Ceiling with angle, Suspended, Mounting rail, Wall with bracket, Wall with angle
Operating position:	downwards radiation, forwards radiation, horizontal
Mounting:	2-point

Housing

Housing material:	Glass fibre reinforced polyester
Colour:	grey

Cover

Cover type / material:	Diffuser (PC)
Cover characteristic:	pearled
Closure:	Clips (Stainless steel (1.4310))

Other features

International Food Standard (IFS):	Yes

Dimension/Weight

Length:	1572.00 mm
Width / Diameter:	116.00 mm
Height:	98.00 mm
Net weight:	2.80 kg

163 15L VARIO IFS

[Item no. : 16319 0011]

Optional accessories / spare parts

Item no.	Item name	Item description
16711 9001	ABD 163 036 F G2	cover PMMA frosted
16711 9002	ABD 163 058 F G2	cover PMMA frosted
16311 9004	ABD 163 036 PC	cover PC clear pearled
16311 9005	ABD 163 058 PC	cover PC clear pearled
90063 9000	2511	blanking plug M20
25610 9000	2561	cable gland M20
25600 9000	2560	cable gland M25
90123 9007	163 KK/KKS VE08	locking clips (8 pcs.) with 2 safety clips
90123 9006	163 KE/KES VE08	locking clips (8 pcs.) with 2 safety clips
90123 9004	163 KKS P	safety clips (1 pair)
90123 9005	163 KES P	safety clips (1 pair)
90004 0002	SK 140	wire guard powder coated for 161 12..
90004 0003	SK 165	wire guard powder coated for 161 15..
90245 0003	163 RO 112 A P	2 pipe clamps 1 1/2", stainless steel, with support
90245 0004	163 RO 2 A P	2 pipe clamps 2", stainless steel, with support
90049 0002	183 S	hook stainless steel for chain mounting
90095 0001	DS 183	ceiling rail stainless steel with M5 screw