
LED high-bay floodlight

DUEVO
3301 L210TB VARIO
[Item no. : 33011 0003]




General product description

LED high bay light fitting DUEVO of the GreenLine series with outstanding sustainable product design and variably adjustable luminous flux. Die-cast aluminium housing, powder-coated, multi-part, thermally separated, consisting of: ECG housing with incorporated ECG and smooth surface, ready for connection as well as LED housing with LED modules, frameless tempered safety glass pane and surface with flat cooling fins. LED modules, direct beam, Multi-Layer Technology, with direct connection to the housing for perfect thermal management. ECG with overload and short circuit protection. See "Optional accessories" for mounting material.



General product benefits

- reduction of type diversity due to variably adjustable luminous flux
- simple, fast and toolless setting of the luminous flux on-site by means of integrated switch, adjustable at any time
- high flexibility due to almost infinitely variable luminous flux setting
- highly economical stocking
- extremely high service life due to high-quality components and optimal thermal management
- perfect thermal management due to direct connection of the LED modules to the housing and separation of ECG and LED housing, large cooling surface, excellent thermal conductivity
- uniform illumination due to Multi-Layer Technology, i.e. every individual LED illuminates the whole surface, the light distribution curves of the LED are overlapping
- "D"-sign - suitable for rooms with increased risk of fire
- colour rendering index CRI>80, according to the workplace guidelines suitable for nearly all plant locations
- variable electrical connection options due to 8 cable entries on the top and side (optional in-out wiring)
- sustainable, interchangeable components
- future proof by using standardised Zhaga LED modules
- GreenLine luminaire, outstanding sustainable design

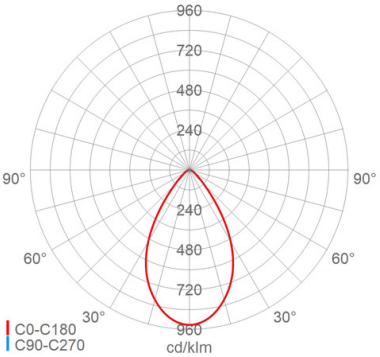



Applications

- production areas and warehouses in commerce, trade and industry, e.g. maintenance halls, assembly plants, cold Rooms, refrigerated warehouses, DIY stores, rack aisles, high-bay warehouses, roofed outdoor areas of petrol stations, driveways etc.

DUEVO
3301 L210TB VARIO
[Item no. : 33011 0003]

Technical data

General

EAN/GTIN:	4041254397948

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	77 W, 135 W
Luminaire luminous flux:	12040 lm, 20200 lm
Luminous efficacy:	156 lm/W, 150 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 80
Light colour:	840
Admissible ambient temperature T_a:	-25 °C to +50 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection
Energy efficiency class:	C
Overvoltage protection:	2 kV
I LED max:	700 mA
BEG-eligible (Germany):	Yes
Special features:	variable and almost stepless adjustable luminous flux (Attention: only min, max values listed above)

Lighting technology

Optical system:	Lens optics
Optical system material:	PMMA
Light distribution:	narrow wide beam
Beam angle:	65 °
Photobiological safety:	RG1

Service life

Service life LED:	L70>100000 h (@ Ta max), L90>50000 h (@ Ta 25°C)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 3-polig, 0,75 - 2,5 mm²
Max. no. with circuit breaker B16:	10
CB B10/B13/B20:	7/9/13
CB C10/C13/C16/C20:	10/13/17/20
Cable entries:	M25 (2x), cable gland (1x), screw plug (1x), Plastic, 9 - 17 mm

Features/Certificates

Protection class:	I
IP rating:	IP65
IK rating:	IK10
Limited surface temperature D:	Yes
Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Suspended
Operating position:	downwards radiation
Mounting:	Multi-point

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	grey, DB 702

Cover

Cover type / material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed (Stainless steel (1.4301))

Sustainability

GreenLine:	Yes
Rezyklat material content ≥ 50%:	50 %
Dismountable at end of life:	Yes
≥ 80% recycelable:	80 %
Construction modular:	Yes
Spareparts availability > 10 years:	Yes
luminaire is upgradeable:	Yes
Guarantee 5 years:	Yes
Packaging made of 100% recyclet paper:	Yes

Dimension/Weight

Length:	549.00 mm
Width / Diameter:	420.00 mm
Height:	100.00 mm
Net weight:	9.20 kg

DUEVO
3301 L210TB VARIO
[Item no. : 33011 0003]

Optional accessories / spare parts

Item no.	Item name	Item description
33001 9001	ABD 3301 ESGW	safety glass pane clear (for 1 segment)
33001 9010	ABD 3301 C PMMA	PMMA pane frosted for glare limitation (for 1 segment)
25600 9000	2560	cable gland M25
25720 9000	2572	screw plug M25
33001 9002	DBF 3301/3302	ceiling mounting (1 pair) painted steel
33001 9013	SD 3301/3302	Vibration-absorbing mounting, painted steel
33001 9008	3301 D BS	1 pair of ceiling mountings, sheet steel varnished, ball-proof (additional mounting holes in the housing required. Not upgradable!)
33001 9003	3301 WW	1 wall mounting angle, sheet steel varnished, adjustable (additional mounting holes in the housing required. Not upgradable!)
90022 0006	BF SAH Y 420/45 ST P	