
LED floodlight

FOCO XL
7800 L420TB VARIO 730
[Item no. : 78003 0015]




General product description

LED floodlight FOCO XL with variably adjustable luminous flux. Consisting of powder-coated die-cast aluminium housing, two-part. Upper part with LED modules, lower part with ECG, tempered safety glass pane, cable entry and strain relief, hinged. Zhaga LED modules, direct beam, Multi-Layer Technology. ECG with high surge protection, overload and short circuit protection. Mounting bracket with swivel range of 180°.



General product benefits

- reduction of type diversity due to variably adjustable luminous flux
- simple, fast and toolless setting of the luminous flux on-site by means of integrated DIP switch, adjustable at any time
- high flexibility due to variable luminous flux setting
- highly economical stocking
- perfect thermal management due to direct connection of the LED modules to the housing, large cooling surface, excellent thermal conductivity
- homogenous illumination due to Multi-Layer Technology, i.e. every individual LED illuminates the whole surface, the light distribution curves of the LED are overlapping
- comfortable maintenance due to hinged and removable lower part of the housing, large opening allows easy access to the terminal box and the electrical components, ECG replaceable on-site
- no light emission into the upper half space, ULOR=0
- versions dimmable to 10% and with color temperature up to 3,000 K comply with Dark Sky requirements
- interchangeable components
- future proof by using standardised Zhaga LED modules

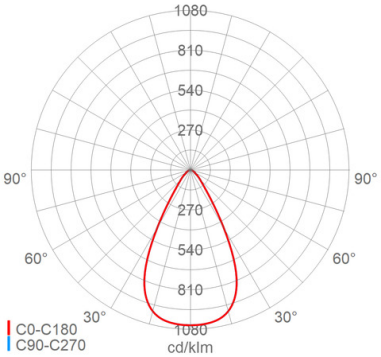

Applications

- industrial and storage areas, construction sites, surface mining large-scale equipment, facade illumination etc.

FOCO XL
7800 L420TB VARIO 730
[Item no. : 78003 0015]

Technical data

General

EAN/GTIN:	4041254389165

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	64 W, 280 W
Luminaire luminous flux:	10320 lm, 41720 lm
Luminous efficacy:	161 lm/W, 149 lm/W
Colour temperature:	3000 K
Colour rendering (CRI):	≥ 70
Light colour:	730
Admissible ambient temperature T_a:	-40 °C to +40 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection
Energy efficiency class:	C
Overvoltage protection:	10 kV
I LED max:	700 mA
Special features:	variable and almost stepless adjustable luminous flux (Attention: only min, max values listed above)

Lighting technology

Optical system:	Lens optics
Optical system material:	PMMA
Light distribution:	narrow wide beam
Beam angle:	65 °
Photobiological safety:	RG1

Service life

Service life LED:	L95>100000 h (@ Ta max)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Screw terminal, 3-polig, 0,75 - 2,5 mm²
Max. no. with circuit breaker B16:	4
CB B10/B13/B20:	3/4/6
CB C10/C13/C16/C20:	4/5/6/8
Cable entries:	M25 (1x), cable gland (1x), Plastic, 9 - 17 mm

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK09
Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Ceiling with bracket, Wall with bracket
Operating position:	downwards radiation
Mounting:	2-point
Swivel range:	0 - 180 °
Wind-exposed surface:	0.27 m²

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	grey, DB 702

Cover

Cover type / material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed

Other features

Pressure compensation system:	Yes

Product life cycle

Dismountable at end of life:	Yes
recyclable:	80 %
Construction modular:	Yes
Spareparts availability > 10 years:	Yes
luminaire is upgradeable:	Yes
Guarantee 5 years:	Yes
Packaging made of 95% recyclet paper:	Yes

Dimension/Weight

Length:	648.00 mm
Width / Diameter:	540.00 mm
Height:	100.00 mm
Net weight:	17.00 kg

FOCO XL
7800 L420TB VARIO 730
[Item no. : 78003 0015]

Optional accessories / spare parts

Item no.	Item name	Item description
78001 9001	ABD 7800 ESGW	safety glass pane clear
90313 0002	KV M25 BK	cable gland M25
90549 0001	ESSB HSM	Inrush current limiter for top-hat rail mounting
79511 0001	TR 1200/108/170/5 M10/12	
79511 0006	TR 1200/76/170/5 M10/12	
79511 0004	TR 900/108/170/4 M10/12	
79511 0007	TR 900/76/170/4 M10/12	
79511 0005	MABD 108	Pole cover ø108mm with strain relief and 4 cable entries
79511 0010	BFSET M10/M12	fastening set with 2 M10 screw connections 1 M12 screw connection
75739 9001	MAU 1 76/170 M10	
75739 9002	MAU 2 76/170 M10	
90270 0006	ROB 60/76 G2	
75350 0033	SD 7800 ST	Vibration-absorbing mounting, galvanised steel
99100 0040	AKB 4,0m H07RN-F 3G1,5	Connection cable 4,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0041	AKB 4,5m H07RN-F 3G1,5	Connection cable 4,5 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0042	AKB 5,0m H07RN-F 3G1,5	Connection cable 5,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0044	AKB 6,0m H07RN-F 3G1,5	Connection cable 6,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0046	AKB 7,0m H07RN-F 3G1,5	Connection cable 7,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0048	AKB 8,0m H07RN-F 3G1,5	Connection cable 8,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0050	AKB 9,0m H07RN-F 3G1,5	Connection cable 9,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0052	AKB 10,0m H07RN-F 3G1,5	Connection cable 10,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0056	AKB 12,0m H07RN-F 3G1,5	Connection cable 12,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0074	AKB 5,0m H07RN-F 4G1,5	Connection cable 5,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
		Connection cable 6,0 m H07RN-F 4x1,5mm², connected to the above

FOCO XL
7800 L420TB VARIO 730
[Item no. : 78003 0015]

99100 0076	AKB 6,0m H07RN-F 4G1,5	mentioned luminaire
99100 0078	AKB 7,0m H07RN-F 4G1,5	Connection cable 7,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0080	AKB 8,0m H07RN-F 4G1,5	Connection cable 8,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0082	AKB 9,0m H07RN-F 4G1,5	Connection cable 9,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0084	AKB 10,0m H07RN-F 4G1,5	Connection cable 10,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0088	AKB 12,0m H07RN-F 4G1,5	Connection cable 12,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire