

EVG 7950 3 14404 OV

[Item no. : 79512 0012]



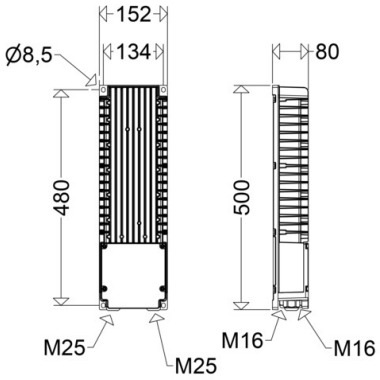

EVG 7950 3 14404 OV

[Item no. : 79512 0012]

Technical data

General

EAN/GTIN:	4041254434308

Key technical data

Connected load:	1296 W
Luminous efficacy:	0 lm/W
Admissible ambient temperature T_a:	-40 °C to +50 °C
Control gear:	Overload protection, Short circuit protection
Overvoltage protection:	10 kV
I LED max:	1000 mA

Lighting control

Dimmable:	Yes
Dimming method:	DALI (DIMD)
Dimming range:	10 - 100 %
DALI-addresses per luminaire:	1
DALI-standard:	Part 101, Part 102, Part 150, Part 207, Part 250, Part 251, Part 252, Part 253

Electrical connection

Rated voltage:	230 V, 400 V, 50/60 Hz
Terminal clamp:	Cage clamp, 14-polig, 1,5 - 2,5 mm²
Max. no. with circuit breaker B16:	1
CB B10/B13/B20:	1/1/2
CB C10/C13/C16/C20:	1/1/1/2
Cable entries:	M25 (2x), M16 (2x), cable gland (4x), Plastic, 13,7 - 18,4 mm

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK08
Approval marks:	CE, ENEC

Mounting

Mounting:	Multi-point

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	grey

Other features

Vibration-proof (RF):	Yes
Pressure compensation system:	Yes

Dimension/Weight

Length:	500.00 mm
Width / Diameter:	152.00 mm

Dimension/Weight

Height:	80.00 mm
Net weight:	6.40 kg

EVG 7950 3 14404 OV

[Item no. : 79512 0012]

Mandatory accessories

Item no.	Item name	
79502 0207	7950 14404SP 730 OV	
79502 0203	7950 14404SP OV	
79511 0002	VBOX 5 TR	