
LED high-bay floodlight


AREALO 2
7955 L360TB DIMD V
[Item no. : 79553 0008]



General product description


LED high bay light fitting AREALO 2 of the GreenLine series with outstanding sustainable product design for galvanising plants. Consisting of powder-coated die-cast aluminium housing with LED modules and ECG, tempered safety glass pane, cable entry and strain relief. Zhaga LED modules, direct beam, Multi-Layer Technology. ECG with high surge protection, overload and short circuit protection. Stable frame construction made of hot-dip galvanised steel with additional powder coating for suspension.





General product benefits

- extremely sturdy special version
- perfect thermal management due to direct connection of the LED modules to the housing, large cooling surface, excellent thermal conductivity
- homogenous illumination due to Multi-Layer Technology, i.e. every individual LED illuminates the whole surface, the light distribution curves of the LED are overlapping
- sustainable, interchangeable components
- future proof by using standardised Zhaga LED modules
- GreenLine luminaire, outstanding sustainable design

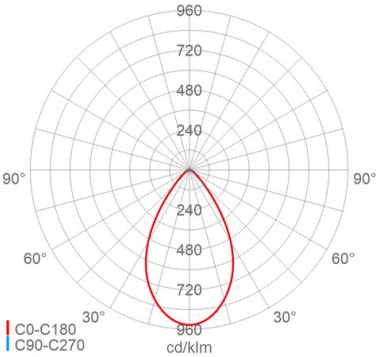

Applications

- production areas in galvanising plants

AREALO 2
7955 L360TB DIMD V
[Item no. : 79553 0008]

Technical data

General

EAN/GTIN:	4041254441429

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	212 W
Luminaire luminous flux:	35300 lm
Luminous efficacy:	167 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 80
Light colour:	840
Admissible ambient temperature T_a:	-40 °C to +45 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection
Energy efficiency class:	C
Overvoltage protection:	4 kV
I LED max:	1000 mA

Lighting control

Dimmable:	Yes
Dimming method:	DALI (DIMD)
Dimming range:	10 - 100 %

Lighting technology

Optical system:	Lens optics
Optical system material:	PMMA
Light distribution:	narrow wide beam
Beam angle:	60 °
Photobiological safety:	RG1

Service life

Service life LED:	L70>100000 h (@ Ta max), L90>50000 h (@ Ta 25°C)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 5-polig, 0,5 - 2,5 mm²
Max. no. with circuit breaker B16:	13
CB B10/B13/B20:	9/11/17
CB C10/C13/C16/C20:	13/17/22/27
Cable entries:	M25 (1x), cable gland (1x), Plastic, 9 - 17 mm

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK09

Features/Certificates

Limited surface temperature D:	Yes
Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Suspended
Operating position:	downwards radiation
Mounting:	2-point, Multi-point, 1-point
Wind-exposed surface:	0.15 m²

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	grey, DB 702

Cover

Cover type / material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed

Other features

Pressure compensation system:	Yes

Sustainability

GreenLine:	Yes
Rezyklat material content ≥ 50%:	50 %
Dismountable at end of life:	Yes
≥ 80% recycelable:	80 %
Construction modular:	Yes
Spareparts availability > 10 years:	Yes
luminaire is upgradeable:	Yes
Guarantee 5 years:	Yes
Packaging made of 100% recyclet paper:	Yes

Dimension/Weight

Length:	578.00 mm
Width / Diameter:	444.00 mm
Height:	94.00 mm
Net weight:	14.50 kg

AREALO 2
7955 L360TB DIMD V
[Item no. : 79553 0008]

Optional accessories / spare parts

Item no.	Item name	Item description
79558 0001	ABD 7955 ESGW	safety glass pane clear
90549 0001	ESSB HSM	Inrush current limiter for top-hat rail mounting
99100 0040	AKB 4,0m H07RN-F 3G1,5	Connection cable 4,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0041	AKB 4,5m H07RN-F 3G1,5	Connection cable 4,5 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0042	AKB 5,0m H07RN-F 3G1,5	Connection cable 5,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0044	AKB 6,0m H07RN-F 3G1,5	Connection cable 6,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0046	AKB 7,0m H07RN-F 3G1,5	Connection cable 7,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0048	AKB 8,0m H07RN-F 3G1,5	Connection cable 8,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0050	AKB 9,0m H07RN-F 3G1,5	Connection cable 9,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0052	AKB 10,0m H07RN-F 3G1,5	Connection cable 10,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0056	AKB 12,0m H07RN-F 3G1,5	Connection cable 12,0 m H07RN-F 3x1,5mm², connected to the above mentioned luminaire
99100 0074	AKB 5,0m H07RN-F 4G1,5	Connection cable 5,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0076	AKB 6,0m H07RN-F 4G1,5	Connection cable 6,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire
99100 0088	AKB 12,0m H07RN-F 4G1,5	Connection cable 12,0 m H07RN-F 4x1,5mm², connected to the above mentioned luminaire