
Explosion-protected LED emergency light fitting

ExeLed 1 N
e864F 06L42/3/4 DIMDI
[Item no. : 86405 0153]




General product description

Explosion-protected LED emergency light fitting ExeLED 1 N for zone 1/21. Glass fibre reinforced polyester housing with separate battery box at one small side of the housing, frosted cover made of polycarbonate with silicone gasket and stainless steel clips, two of them as safety clip. Steel reflector, varnished, carrying the encapsulated LED modules, clipped into the cover, removable as a unit. Encapsulated ECG with automatic monitoring according to EN 62034 and optical indication of the test results. Battery box with NiMH battery and electronic charger, deep discharge protection according to EN 61347-2-7, short circuit protected battery and reverse battery protection. Recharging time: 24h according to EN 60598-2-22 External mounting system for variable mounting (accessory).



General product benefits

- Security in case of emergency - instant light with maximum luminous flux
- multifunctional LED with coded indication of functions, states and potential faults of the electronic device or the battery
- automatic weekly function test
- automatic annual duration test, manual actuation possible at any time
- easy battery replacement due to plug connection
- innovative LED encapsulation with high transmission factor for least loss of light
- LED modules protected against mechanical and electrostatic damage by sandwich design of reflector and cover
- homogenous illumination due to frosted cover for comfortable perception of light and brilliant glare limitation
- high colour rendering index CRI≥80, according to the workplace guidelines suitable for nearly all plant locations
- FastFix mounting system - external mounting system for variable mounting distances and easy installation (accessory)
- sustainable, interchangeable components

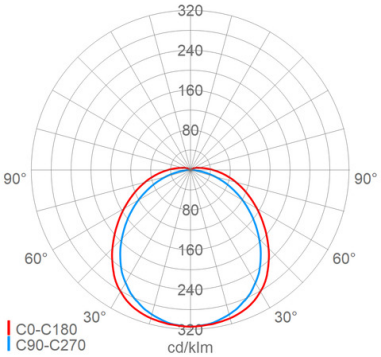

Applications

- hazardous areas zone 1 (gas) and zone 21 (dust)
- safety lighting of workplaces with particular risk as well as illumination / marking of escape and rescue routes
- light fitting is not suitable for use in areas with permanently high humiditiy and short operation time, e.g. sewage plants and rainwater retention basins

Explosion-protected LED emergency light fitting

ExeLed 1 N
e864F 06L42/3/4 DIMDI
[Item no. : 86405 0153]

Technical data

General

EAN/GTIN:	4041254432342

Explosion protection

EX-Zone:	1 , 21 , 2 , 22
EX-marking gas:	II 2 G Ex db eb [ib] mb q IIC T4 Gb
EX-marking dust:	II 2 D Ex tb IIIC T80°C Db
Primary ignition protection method:	eb
Temperature class:	T4
Surface temperature:	T80°C
ATEX:	IBExU 17 ATEX 1026X
IECEx:	IECEx IBE 17.0016X

Emergency lighting

Emergency power supply:	self-contained (MA)
Operating mode:	Stand-by mode (BS), Maintained mode (DS)
Luminaire luminous flux emergency operation:	700 lm
Ballast lumen factor:	17 %
Monitoring:	Self test
Ambient temperature (BS):	0 °C to +45 °C
Battery type:	NiMH
operating time:	3 h
Special features:	Only for use on DALI monitoring / controllers with support for self-contained emergency luminaires (device type 1). Nominal ambient temperature range according to EN 60598-2-22; below 0° C emergency lighting duration may be restricted:

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source with reflector and control gear replaceable by qualified person
Connected load:	29 W
Luminaire luminous flux:	4100 lm
Luminous efficacy:	141 lm/W
Colour temperature:	6500 K
Colour rendering (CRI):	≥ 80
Light colour:	865
Admissible ambient temperature T_a:	-30 °C to +50 °C

Key technical data

Control gear:	1 x ECG, Overload protection, Short circuit protection
BEG-eligible (Germany):	Yes

Lighting control

Dimmable:	Yes
Dimming method:	DALI (DIMD)
Dimming range:	7 - 100 %
DALI-addresses per luminaire:	1
DALI-standard:	DT1, DT6

Lighting technology

Light distribution:	wide beam
Photobiological safety:	RG1

Service life

Service life LED:	L80B50>100000 h (@ Ta max), L90B50>95000 h (@ Ta 25°C)

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 6-polig, 1 - 4 mm²
Max. no. with circuit breaker B16:	13
CB B10/B13/B20:	9/11/17
CB C10/C13/C16/C20:	13/17/22/27
Cable entries:	M25 (2x), cable gland (2x), blanking plug (1x), Plastic, 8 - 17 mm
In-out wiring (RR):	Yes

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK10
Approval marks:	CE

Mounting

Mounting method (accessories possibly needed):	Ceiling with bracket, Ceiling with angle, Wall with bracket, Wall with angle, Suspended, Pole with pipe clamp, Pipe clamp
Operating position:	horizontal, vertical, downwards radiation
Mounting:	2-point

Housing

Housing material:	Glass fibre reinforced polyester
Colour:	grey

Cover

Cover type / material:	Diffuser (PC)
Cover characteristic:	satined

Explosion-protected LED emergency light fitting

ExeLed 1 N
e864F 06L42/3/4 DIMDI
[Item no. : 86405 0153]

Cover

Closure:	Clips (Stainless steel (1.4571))

Other features

International Food Standard (IFS):	Yes

Dimension/Weight

Length:	805.00 mm
Width / Diameter:	182.00 mm
Height:	114.00 mm
Net weight:	6.20 kg

ExeLed 1 N
e864F 06L42/3/4 DIMDI
[Item no. : 86405 0153]

Optional accessories / spare parts

Item no.	Item name	Item description
90222 9036	Akku NiMH 4,0Ah 6,0V Block 8024	NiMH accu, 6.0 V 4.0 Ah, block (pay attention to the correct part number)
90222 9035	Akku NiMH 2,2Ah 6,0V Block 8022	NiMH accu, 6.0 V 2.2 Ah, block (pay attention to the correct part number)
90222 9021	Akku NiCd 4,0Ah 6,0V Block 2627	NiCd accu, 6.0 V 4.0 Ah, Block (pay attention to the correct part number)
90222 9023	Akku NiCd 1,6Ah 6,0V Block 8020	NiCd accu, 6.0 V 1.6 Ah, Block (pay attention to the correct part number)
86601 9014	ABD 8652F	cover PC satined
86601 9001	ABD 8654F	cover PC satined
86601 9000	ABD 8654	cover PC clear
90117 9006	2537 G	cable gland M25 with locknut for Ex-Zone 1/21
90118 9006	2538 G	screw plug M25 with locknut for Ex-Zone 1/21
90119 9001	2539 G	cable gland M25 with blanking plug and locknut for Ex-Zone 1/21
90259 9000	KS25 G EX	breathing gland M25 for Ex-Zone 1/21
86501 9003	HK 865 P	wall and ceiling mounting (1 pair) stainless steel 1.4310 for variable mounting in indoor areas
90001 0002	H8V P	2 suspension eyes with bolt M8, stainless steel
90000 0002	DS 15A P	ceiling rail (1 pair) galvanised steel with 2 M8 screws
90032 0002	DS 15AV P	ceiling rail (1 pair) stainless steel 1.4571 with 2 M8 screws
90037 0004	RO84 112 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 1/2" with support and 4 M8 screws also for pole mounting
90038 0004	RO84 2 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 2" with support and 4 M8 screws also for pole mounting
26000 0008	WW 26 L P	wall mounting (1 pair) galvanised steel 55° with 2 M8 screws long version
26000 0002	WW 26/30 P	wall mounting (1 pair) galvanised steel 30° with 2 M8 screws
26000 0003	WW 26/45 P	wall mounting (1 pair) galvanised steel 45° with 2 M8 screws