


Explosion-protected LED high-bay floodlight

ExSTREAM


e8825/6 L300B

[Item no. : 88250 0010]



General product description

Explosion-proof LED high bay luminaire ExSTREAM for Zone 1/21. Multi-part housing made of die-cast aluminum, powder-coated, thermally separated. Several LED housings with LED modules, highly efficient optics, direct distribution, multi-layer technology as well as temperature change-resistant safety glass. Cooling rib structure and direct connection of the LED to the housing to ensure optimal thermal management. Rear-mounted ECG housing made of die-cast aluminum, powder-coated, with built-in control gear, large connection space and two cable entries for in-out wiring. See optional accessories for attachment.




General product benefits

- robust, modular design
- highly efficient by using high-quality LED modules
- extremely high service life even at maximum admissible ambient temperature
- perfect thermal management due to direct connection of the LED modules to the aluminum housing, separation of ECG and LED housing, LED housing with integrated cooling fin structure, large cooling surface, excellent heat dissipation, very good convection
- colour rendering index CRI>80, according to the workplace guidelines suitable for nearly all plant locations
- homogenous and effective light distribution due to specially calculated lens optics
- sustainable, interchangeable components

Applications

Hazardous areas zone 1 (gas) and zone 21 (dust), Production, assembly and storage halls in the chemical and pharmaceutical industries, mills, paper mills, etc.

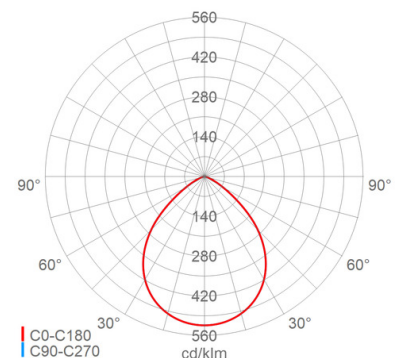

Explosion-protected LED high-bay floodlight

ExSTREAM**e8825/6 L300B****[Item no. : 88250 0010]****Technical data****Explosion protection**

EX-Zone:	1 , 21 , 2 , 22
EX-marking gas:	II 2 G Ex eb mb q IIC T4 Gb
EX-marking dust:	II 2 D Ex tb IIIC T100 °C Db
Primary ignition protection method:	eb
Temperature class:	T4
Surface temperature:	T100°C
ATEX:	IBExU 20 ATEX 1117
IECEX:	IECEX IBE 20.0028
UKCA:	BAS21UKEX0580

Key technical data

Light source:	LED
Exchangeability:	light source with LED-housing and control gear replaceable by qualified person
Connected load:	250 W
Luminaire luminous flux:	31600 lm
Luminous efficacy:	126 lm/W
Colour temperature:	5500 K
Colour rendering (CRI):	≥ 80
Light colour:	855
Admissible ambient temperature T _a :	-30 °C to +40 °C
Control gear:	2 x ECG, Overload protection , Short circuit protection

Lighting technology

Light distribution:	wide beam
Photobiological safety:	RG2

Service life

Service life LED:	L80B50>100000 h (@ T _a max), L80B50>100000 h (@ T _a 25°C), L90B50>90000 h (@ T _a 25°C)
-------------------	---

Electrical connection

Rated voltage:	220 - 240 V, 0 Hz, 50/60 Hz
Terminal clamp:	Cage clamp, 5-polig, 1 - 4 mm ²
Max. no. (with CB B16):	6
CB B10/B13/B20:	4/5/8
CB C10/C13/C16/C20:	6/8/10/12
Cable entries:	M25 (2x), cable gland (2x), blanking plug (1x), Plastic, 8 - 17 mm
In-out wiring (RR):	Yes

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	DB 702

Cover

Cover type/material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed (Stainless steel (1.4301))

Mounting

Mounting method (accessories possibly needed):	Suspended
Operating position:	downwards radiation
Mounting:	Multi-point

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK08
Approval marks:	CE
Energy efficiency class:	D

Dimension/Weight

Length:	634.00 mm
Width/Diameter:	468.00 mm
Height:	121.00 mm
Net weight:	13.50 kg
EAN/GTIN:	4041254352770

Explosion-protected LED high-bay floodlight

ExSTREAM

e8825/6 L300B

[Item no. : 88250 0010]

Optional accessories/spare parts

Item no.	Item name	Item description
90117 9000	2537	cable gland M25 for Ex-Zone 1/21
90119 9000	2539	cable gland M25 with blanking plug for Ex-Zone 1/21
33001 9004	3301/3302 Y P	1 pair of Y-ropes
26000 0010	DW 8825 P	ceiling mounting (1 pair) painted steel with 2 M10 screws