




Explosion-protected LED high-bay floodlight

ExSTREAM**e8825/6 L300B**

[Item no. : 88250 0010]

**General product description**


Explosion-proof LED high bay luminaire ExSTREAM for Zone 1/21. Multi-part housing made of die-cast aluminum, powder-coated, thermally separated. Several LED housings with LED modules, highly efficient optics, direct distribution, multi-layer technology as well as temperature change-resistant safety glass. Cooling rib structure and direct connection of the LED to the housing to ensure optimal thermal management. Rear-mounted ECG housing made of die-cast aluminum, powder-coated, with built-in control gear, large connection space and two cable entries for in-out wiring. See optional accessories for attachment.

**General product benefits**

- robust, modular design
- highly efficient by using high-quality LED modules
- extremely high service life even at maximum admissible ambient temperature
- perfect thermal management due to direct connection of the LED modules to the aluminum housing, separation of ECG and LED housing, LED housing with integrated cooling fin structure, large cooling surface, excellent heat dissipation, very good convection
- colour rendering index CRI>80, according to the workplace guidelines suitable for nearly all plant locations
- homogenous and effective light distribution due to specially calculated lens optics
- sustainable, interchangeable components

Applications

- hazardous areas zone 1 (gas) and zone 21 (dust)
- production, assembly and storage halls in the chemical and pharmaceutical industries, mills, paper mills, etc.
- light fitting is not suitable for use in areas with permanently high humidity and short operation time, e.g. sewage plants and rainwater retention basins

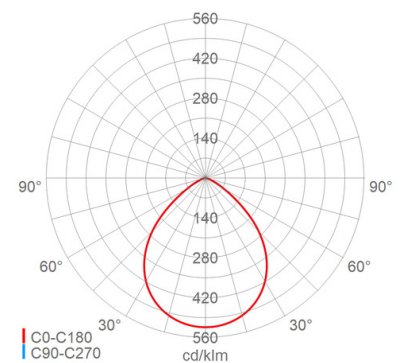

Explosion-protected LED high-bay floodlight

ExSTREAM

e8825/6 L300B

[Item no. : 88250 0010]

Technical data

General

EAN/GTIN: 4041254352770

Explosion protection

EX-Zone: 1, 21, 2, 22
 EX-marking gas: II 2 G Ex eb mb q IIC T4 Gb
 EX-marking dust: II 2 D Ex tb IIIC T100 °C Db
 Primary ignition protection method: eb
 Temperature class: T4
 Surface temperature: T100°C
 ATEX: IExU 20 ATEX 1117
 IECEx: IECEx IBE 20.0028

Key technical data

Light source: LED
 Exchangeability: light source with LED-housing and control gear replaceable by qualified person
 Connected load: 250 W
 Luminaire luminous flux: 31600 lm
 Luminous efficacy: 126 lm/W
 Colour temperature: 5500 K
 Colour rendering (CRI): ≥ 80
 Light colour: 855
 Admissible ambient temperature T_a: -30 °C to +40 °C
 Control gear: 2 x ECG, Overload protection, Short circuit protection
 Energy efficiency class: D
 BEG-eligible (Germany): Yes

Lighting technology

Optical system: Lens optics
 Optical system material: PC
 Light distribution: wide beam
 Photobiological safety: RG2

Service life

Service life LED: L80B50>100000 h (@ T_a max),
 L80B50>100000 h (@ T_a 25°C),
 L90B50>90000 h (@ T_a 25°C)

Electrical connection

Rated voltage: 220 - 240 V, 0 Hz, 50/60 Hz
 Terminal clamp: Cage clamp, 5-polig, 1 - 4 mm²
 Max. no. with circuit breaker B16: 6
 CB B10/B13/B20: 4/5/8
 CB C10/C13/C16/C20: 6/8/10/12

Electrical connection

Cable entries: M25 (2x), cable gland (2x), blanking plug (1x), Plastic, 8 - 17 mm
 In-out wiring (RR): Yes

Features/Certificates

Protection class: I
 IP rating: IP66
 IK rating: IK08
 Approval marks: CE

Mounting

Mounting method (accessories possibly needed): Suspended
 Operating position: downwards radiation
 Mounting: Multi-point

Housing

Housing material: Die-cast aluminium
 Varnished: Yes
 Colour: DB 702

Cover

Cover type / material: Pane (Safety glass)
 Cover characteristic: clear
 Closure: screwed (Stainless steel (1.4301))

Dimension/Weight

Length: 634.00 mm
 Width / Diameter: 468.00 mm
 Height: 121.00 mm
 Net weight: 13.50 kg

Explosion-protected LED high-bay floodlight

ExSTREAM**e8825/6 L300B**

[Item no. : 88250 0010]

Optional accessories / spare parts

Item no.	Item name	Item description
90117 9000	2537	cable gland M25 for Ex-Zone 1/21
90119 9000	2539	cable gland M25 with blanking plug for Ex-Zone 1/21
33001 9004	3301/3302 Y P	1 pair of Y-ropes
26000 0010	DW 8825 P	ceiling mounting (1 pair) painted steel with 2 M10 screws