

## Explosion-protected LED high-bay floodlight

### ExDUEVO

#### nD8301 L160TB

[ Item no. : 83010 0008 ]



#### General product description



Explosion-protected LED high bay light fitting ExDUEVO of the GreenLine series with outstanding sustainable product design for zone 2/22. Die-cast aluminium housing, multi-part, thermally separated, powder-coated, consisting of: ECG housing with incorporated ECG and smooth surface as well as LED housing with LED modules, frameless tempered safety glass pane and surface with flat cooling fins. LED modules direct beam, Multi-Layer-Technology, with direct connection to the housing for perfect thermal management. ECG with overvoltage, overload and short circuit protection as well as DALI interface for dimming operation.

#### General product benefits

- extremely high service life even at maximum admissible ambient temperature
- perfect thermal management due to direct connection of the LED modules to the housing and separation of ECG and LED housing, large cooling surface, excellent thermal conductivity
- DALI interface (standard) for dimming operation
- colour rendering index  $CRI \geq 80$ , according to the workplace guidelines suitable for nearly all plant locations
- uniform illumination due to Multi-Layer-Technology, i.e. every individual LED illuminates the whole surface, the light distribution curves of the LED are overlapping
- sustainable, interchangeable components
- future proof by using standardised Zhaga LED modules
- GreenLine luminaire, outstanding sustainable design

#### Applications

Hazardous areas zone 2 (gas) and zone 22 (dust), Production, assembly and storage halls in the chemical and pharmaceutical industries, mills, paper mills, etc.

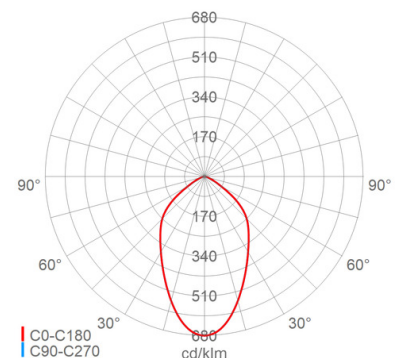

## Explosion-protected LED high-bay floodlight

**ExDUEVO****nD8301 L160TB****[ Item no. : 83010 0008 ]****Technical data****Explosion protection**

EX-Zone:	2 , 22
EX-marking gas:	II 3 G Ex nR IIC T4 Gc
EX-marking dust:	II 3 D Ex tc IIIC T100°C Dc
Primary ignition protection method:	nR
Temperature class:	T4
Surface temperature:	T100°C

**Key technical data**

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source and control gear replaceable by qualified person
Connected load:	96 W
Luminaire luminous flux:	15000 lm
Luminous efficacy:	156 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 80
Light colour:	840
Admissible ambient temperature Ta:	-20 °C to +40 °C
Control gear:	1 x ECG, Overload protection , Short circuit protection

**Lighting control**

Dimmable:	Yes
Dimming method:	DALI (DIMD)
Dimming range:	10 - 100 %

**Lighting technology**

Light distribution:	narrow wide beam
Beam angle:	60 °
Photobiological safety:	RG1

**Service life**

Service life LED:	L70>100000 h (@Ta ≤50°C), L70>90000 h (@Ta >50°C), L80>100000 h (@Ta 25°C), L80>60000 h (@ Ta max)
-------------------	--

**Electrical connection**

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 5-polig, 1 - 4 mm <sup>2</sup>
Max. no. (with CB B16):	22
CB B10/B13/B20:	14/18/28
CB C10/C13/C16/C20:	22/29/37/45
Cable entries:	M25 (1x), cable gland (1x), Plastic, 8 - 17 mm

**Housing**

Housing material:	Die-cast aluminium
Varnished:	Yes

**Housing**

Colour:	grey, DB 702
---------	--------------

**Cover**

Cover type/material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed (Stainless steel (1.4301))

**Mounting**

Mounting method (accessories possibly needed):	Suspended
Operating position:	downwards radiation
Mounting:	Multi-point

**Features/Certificates**

Protection class:	I
IP rating:	IP65
IK rating:	IK10
Approval marks:	CE
Energy efficiency class:	D

**Dimension/Weight**

Length:	549.00 mm
Width/Diameter:	420.00 mm
Height:	100.00 mm
Net weight:	9.20 kg
EAN/GTIN:	4041254325231

**ExDUEVO**  
**nD8301 L160TB**  
[ Item no. : 83010 0008 ]

**Optional accessories/spare parts**

Item no.	Item name	Item description
90117 9006	2537 G	cable gland M25 with locknut for Ex-Zone 1/21
90119 9001	2539 G	cable gland M25 with blanking plug and locknut for Ex-Zone 1/21
33001 9004	3301/3302 Y P	1 pair of Y-ropes
33001 9002	DBF 3301/3302	ceiling mounting (1 pair) painted steel