

Explosion-protected LED emergency light fitting


e856F L20/3/2,5

[Item no. : 85600 0002]




General product description

Compact explosion-protected LED emergency light fitting with central locking system for zone 1/21. Glass fibre reinforced polyester housing, frosted cover made of polycarbonate with silicone gasket. Steel reflector, varnished, with encapsulated LED modules and protective covers, hinged and removable. Encapsulated ECG with automatic monitoring according to EN 62034 and optical indication of the test results. Incorporated NiCd battery with electronic charger, deep discharge protection according to EN 61347-2-7, short circuit protected battery and reverse battery protection. Recharging time: 24h according to EN 60598-2-22.



General product benefits

- Security in case of emergency - instant light with maximum luminous flux
- multifunctional LED with coded indication of functions, states and potential faults of the electronic device or the battery
- automatic weekly function test
- automatic annual duration test, manual actuation possible at any time
- easy battery replacement due to plug connection
- extremely robust light fitting with high material thickness of housing and cover
- comfortable central locking system for fast connection and component exchange
- innovative LED encapsulation with high transmission factor for least loss of light
- homogenous illumination due to frosted cover for comfortable perception of light and brilliant glare limitation
- high colour rendering index $CRI \geq 80$, according to the workplace guidelines suitable for nearly all plant locations
- sustainable, interchangeable components

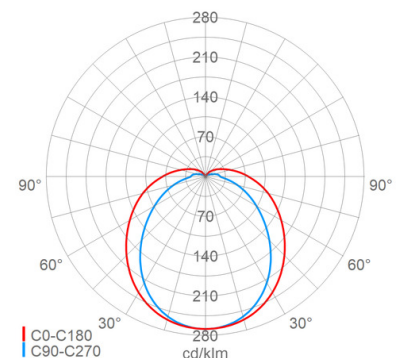

Applications

Hazardous areas zone 1 (gas) and zone 21 (dust), light fitting is not suitable for use in areas with permanently high humidity and short operation time, e.g. sewage plants and rainwater retention basins, emergency lighting of workplaces with particular risk as well as illumination/marketing of escape and rescue routes

Explosion-protected LED emergency light fitting

e856F L20/3/2,5**[Item no. : 85600 0002]****Technical data****Explosion protection**

EX-Zone:	1, 21, 2, 22
EX-marking gas:	II 2 G Ex db eb [ib] mb op is q IIC T4 Gb
EX-marking dust:	II 2 D Ex op is tb IIIC T80°C Db
Primary ignition protection method:	eb
Temperature class:	T4
Surface temperature:	T80°C
ATEX:	IBExU 17 ATEX 1132
IECEX:	IECEX IBE 17.0037

Emergency lighting

Emergency power supply:	self-contained (MA)
Luminaire luminous flux emergency operation:	260 lm
Ballast lumen factor:	13 %
Monitoring:	Self test
Ambient temperature BS:	0 °C to +40 °C
For pictogram application:	Yes
Battery type:	NiCd
operating time:	3 h
Special features:	Nominal temperature reange acc. to EN 60598-2-22; Reduced emergency light duration if operated below 0°C

Key technical data

Light source:	LED
LED module standard:	Zhaga
Exchangeability:	light source with reflector and control gear replaceable by qualified person
Connected load:	19 W
Luminaire luminous flux:	2050 lm
Luminous efficacy:	108 lm/W
Colour temperature:	6500 K
Colour rendering (CRI):	≥ 80
Light colour:	865
Admissible ambient temperature Ta:	-30 °C to +40 °C
Control gear:	1 x ECG, Overload protection, Short circuit protection

Lighting technology

Light distribution:	wide beam
Photobiological safety:	RG1

Service life

Service life LED:	L80B50>100000 h (@ Ta max), L80B50>100000 h (@ Ta 25°C), L90B50>90000 h (@ Ta 25°C)
-------------------	---

Electrical connection

Rated voltage:	220 - 240 V, 50/60 Hz
Terminal clamp:	Cage clamp, 4-polig, 1 - 4 mm ²
Max. no. (with CB B16):	19
CB B10/B13/B20:	12/16/24
CB C10/C13/C16/C20:	19/25/32/39
Cable entries:	M25 (2x), cable gland (2x), Plastic, 8 - 17 mm
In-out wiring (RR):	Yes

Housing

Housing material:	Glass fibre reinforced polyester
Colour:	grey

Cover

Cover type/material:	Diffuser (PC)
Cover characteristic:	satined
Closure:	Central locking (hex socket 13mm) (Plastic)

Mounting

Mounting method (accessories possibly needed):	Suspended, Pole with pipe clamp, Pipe clamp, Mounting rail, Wall with angle, Ceiling, Ceiling with angle, Rope, Wall
Operating position:	downwards radiation, forwards radiation, vertical, horizontal
Mounting:	2-point

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK10
Approval marks:	CE

Dimension/Weight

Length:	440.00 mm
Width/Diameter:	226.00 mm
Height:	152.00 mm
Net weight:	5.60 kg
EAN/GTIN:	4041254312620

Explosion-protected LED emergency light fitting

e856F L20/3/2,5**[Item no. : 85600 0002]****Optional accessories/spare parts**

Item no.	Item name	Item description
90222 9023	AKKU 6V 1,6Ah NiCd Block 8020 AE	spare battery 1.6Ah
90222 9024	AKKU 6V 2,5Ah NiCd Block 8021 AE	spare battery 2.5Ah
85501 9001	ABD 855	
90117 9000	2537	cable gland M25 for Ex-Zone 1/21
90118 9000	2538	screw plug M25 for Ex-Zone 1/21
90119 9000	2539	cable gland M25 with blanking plug for Ex-Zone 1/21
90259 9000	KS25 G EX	breathing gland M25 for Ex-Zone 1/21
90000 0002	DS 15A P	ceiling rail (1 pair) galvanised steel with 2 M8 screws
90032 0002	DS 15AV P	ceiling rail (1 pair) stainless steel 1.4571 with 2 M8 screws
90037 0004	RO84 112 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 1/2" with support and 4 M8 screws also for pole mounting
90038 0004	RO84 2 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 2" with support and 4 M8 screws also for pole mounting
26000 0008	WW 26 L P	wall mounting (1 pair) galvanised steel 55° with 2 M8 screws long version
26000 0002	WW 26/30 P	wall mounting (1 pair) galvanised steel 30° with 2 M8 screws
26000 0003	WW 26/45 P	wall mounting (1 pair) galvanised steel 45° with 2 M8 screws
12112 0006	PIK 121/33 W	self-adhesive pictogram, emergency exit left EKW 30m
12112 0007	PIK 121/34 W	self-adhesive pictogram, emergency exit right EKW 30m
12112 0008	PIK 121/35 W	self-adhesive pictogram, emergency exit down EKW 30m