

Explosion-protected LED emergency light fitting

e856F L10/1/1,6

[Item no. : 85600 0003]

General product description



Compact explosion-protected LED emergency light fitting with central locking system for zone 1/21. Glass fibre reinforced polyester housing, frosted cover made of polycarbonate with silicone gasket. Steel reflector, varnished, with encapsulated LED modules and protective covers, hinged and removable. Encapsulated ECG with automatic monitoring according to EN 62034 and optical indication of the test results. Incorporated NiCd battery with electronic charger, deep discharge protection according to EN 61347-2-7, short circuit protected battery and reverse battery protection. Recharging time: 24h according to EN 60598-2-22.

General product benefits

- Security in case of emergency - instant light with maximum luminous flux
- multifunctional LED with coded indication of functions, states and potential faults of the electronic device or the battery
- automatic weekly function test
- automatic annual duration test, manual actuation possible at any time
- easy battery replacement due to plug connection
- extremely robust light fitting with high material thickness of housing and cover
- comfortable central locking system for fast connection and component exchange
- innovative LED encapsulation with high transmission factor for least loss of light
- homogenous illumination due to frosted cover for comfortable perception of light and brilliant glare limitation
- high colour rendering index $CRI \geq 80$, according to the workplace guidelines suitable for nearly all plant locations
- sustainable, interchangeable components

Applications

Hazardous areas zone 1 (gas) and zone 21 (dust), light fitting is not suitable for use in areas with permanently high humidity and short operation time, e.g. sewage plants and rainwater retention basins, emergency lighting of workplaces with particular risk as well as illumination/marketing of escape and rescue routes

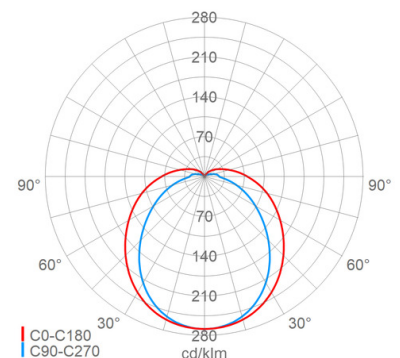

Explosion-protected LED emergency light fitting

e856F L10/1/1,6
[Item no. : 85600 0003]

Technical data

Explosion protection		Service life	
EX-Zone:	1 , 21 , 2 , 22	Service life LED:	L80B50>100000 h (@ Ta max), L80B50>100000 h (@ Ta 25°C), L90B50>90000 h (@ Ta 25°C)
EX-marking gas:	II 2 G Ex db eb [ib] mb op is q IIC T4 Gb	Electrical connection	
EX-marking dust:	II 2 D Ex op is tb IIIC T80°C Db	Rated voltage:	220 - 240 V, 50/60 Hz
Primary ignition protection method:	eb	Terminal clamp:	Cage clamp, 4-polig, 1 - 4 mm²
Temperature class:	T4	Max. no. (with CB B16):	19
Surface temperature:	T80°C	CB B10/B13/B20:	12/16/24
ATEX:	IBExU 17 ATEX 1132	CB C10/C13/C16/C20:	19/25/32/39
IECEX:	IECEX IBE 17.0037	Cable entries:	M25 (2x), cable gland (2x), Plastic, 8 - 17 mm
Emergency lighting		In-out wiring (RR):	Yes
Emergency power supply:	self-contained (MA)	Housing	
Luminaire luminous flux emergency operation:	560 lm	Housing material:	Glass fibre reinforced polyester
Ballast lumen factor:	53 %	Colour:	grey
Monitoring:	Self test	Cover	
Ambient temperature BS:	0 °C to +40 °C	Cover type/material:	Diffuser (PC)
For pictogram application:	Yes	Cover characteristic:	satined
Battery type:	NiCd	Closure:	Central locking (hex socket 13mm) (Plastic)
operating time:	1 h	Mounting	
Special features:	Nominal temperature reange acc. to EN 60598-2-22; Reduced emergency light duration if operated below 0°C	Mounting method (accessories possibly needed):	Suspended, Pole with pipe clamp, Pipe clamp, Mounting rail, Wall with angle, Ceiling, Ceiling with angle, Rope, Wall downwards radiation, forwards radiation, vertical, horizontal
Key technical data		Operating position:	2-point
Light source:	LED	Mounting:	
LED module standard:	Zhaga	Features/Certificates	
Exchangeability:	light source with reflector and control gear replaceable by qualified person	Protection class:	I
Connected load:	11 W	IP rating:	IP66
Luminaire luminous flux:	1060 lm	IK rating:	IK10
Luminous efficacy:	96 lm/W	Approval marks:	CE
Colour temperature:	6500 K	Dimension/Weight	
Colour rendering (CRI):	≥ 80	Length:	440.00 mm
Light colour:	865	Width/Diameter:	226.00 mm
Admissible ambient temperature Ta:	-30 °C to +40 °C	Height:	152.00 mm
Control gear:	1 x ECG, Overload protection , Short circuit protection	Net weight:	5.40 kg
Lighting technology		EAN/GTIN:	4041254312637
Light distribution:	wide beam		
Photobiological safety:	RG1		

Explosion-protected LED emergency light fitting

e856F L10/1/1,6**[Item no. : 85600 0003]****Optional accessories/spare parts**

Item no.	Item name	Item description
90222 9023	AKKU NiCd 6V 1,6Ah Block 8020	NiCd accu, 6.0 V 1.6 Ah, Block (pay attention to the correct part number)
90222 9024	AKKU NiCd 6V 2,5Ah Block 8021	NiCd accu, 6.0 V 2.5 Ah, Block (pay attention to the correct part number)
85501 9001	ABD 855	
90117 9000	2537	cable gland M25 for Ex-Zone 1/21
90118 9000	2538	screw plug M25 for Ex-Zone 1/21
90119 9000	2539	cable gland M25 with blanking plug for Ex-Zone 1/21
90259 9000	KS25 G EX	breathing gland M25 for Ex-Zone 1/21
90000 0002	DS 15A P	ceiling rail (1 pair) galvanised steel with 2 M8 screws
90032 0002	DS 15AV P	ceiling rail (1 pair) stainless steel 1.4571 with 2 M8 screws
90037 0004	RO84 112 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 1/2" with support and 4 M8 screws also for pole mounting
90038 0004	RO84 2 A P	Pipe clamp (1 pair) stainless steel material 1.4571 1 2" with support and 4 M8 screws also for pole mounting
26000 0008	WW 26 L P	wall mounting (1 pair) galvanised steel 55° with 2 M8 screws long version
26000 0002	WW 26/30 P	wall mounting (1 pair) galvanised steel 30° with 2 M8 screws
26000 0003	WW 26/45 P	wall mounting (1 pair) galvanised steel 45° with 2 M8 screws
12112 0006	PIK 121/33 W	self-adhesive pictogram, emergency exit left EKW 30m
12112 0007	PIK 121/34 W	self-adhesive pictogram, emergency exit right EKW 30m
12112 0008	PIK 121/35 W	self-adhesive pictogram, emergency exit down EKW 30m